

3. Activating



Before you can send faxes, you will need to activate your Fax ATA. Refer to specific instructions supplied by your provider or fax server manager. Connections to some service provider fax solutions or premise-based fax servers may not require activation.

To activate your Fax ATA:

1. Make sure you have your **PIN** for activation. This is supplied by your provider or fax server administrator.
2. You activate the Fax ATA from your Fax Machine or MFP.
3. Go off-hook and dial the following:
***1*<PIN>#** (for example, dial ***1*1234#**)
4. Press **SEND** or **START** if your Fax Machine requires this step to start dialing.
5. You will hear an audio confirmation once the activation is complete.

4. Send a Fax

You can now send a fax from your Fax Machine or multi-function printer (MFP).

Getting Help: Go to www.faxata.com for additional help and documentation.

Notice

This guide describes the installation of AudioCodes' **HTTPS Fax ATA** device. For other additional information on the MP-20x Telephone Adapter series, including models MP-201B/1FXS, MP-202B/2FXS and MP-204B/4FXS which do not support HTTPS based fax connections, refer to the downloads section on AudioCodes' web site. Information contained in this document is believed to be accurate and reliable at the time of printing. However, due to ongoing product improvements and revisions, AudioCodes cannot guarantee accuracy of printed material after the date published nor can it accept responsibility for errors or omissions. Updates to this document can be viewed by registered customers at www.faxata.com.

© Copyright 2013 AudioCodes Ltd. All rights reserved.

This document is subject to change without notice. Refer to the current Release Notes that may be included with your documentation or hardware delivery. Date Published: June-04-2013

 AudioCodes

US Patent 8,339,646

AudioCodes CPE & Access Gateway Products

Fax ATA

MediaPack™ Series Telephone Adapters
with Integrated HTTPS Fax Connections

Fax ATA

HTTPS Fax Adapter

Quick Installation Guide

LTRT-18711-HTTPSFAX



HTTPS FAX

 AudioCodes

 AudioCodes
Fax ATA
HTTPS
US Patent 8,339,646

1. Before Installing

Make sure that you have the following:

- ✓ AudioCodes Fax ATA
- Note:** Use only HTTPSFAX labeled version
- ✓ Included 12V power adapter (use only one supplied for your country)



- ✓ Local network (LAN) with DHCP and Internet connection
- ✓ Fax Machine or fax-capable multi-function printer (MFP) with analog line

YOUR FAX SOLUTION

The Fax ATA can be connected to either online service providers or to premise-based fax servers. You may have received additional steps or separate instructions with your Fax ATA, so please check with your specific provider or fax server manager before proceeding.



CREATE YOUR ACCOUNT

Depending on the fax provider or fax solution to which you are connecting your Fax Machine, you may have to first create your account. Refer to your provider supplied instructions that came with the Fax ATA or their Web site for additional steps or details.



If you are connecting your Fax Machine through FaxCONNECT to your own fax service provider account, make sure you sign up and create your account before continuing at: www.faxconnectit.com.

CHECK FAX MACHINE SETTINGS




Turn off your Fax Machine's success notifications. Your fax provider or premise-based fax server will automatically send delivery notifications to your Fax Machine or directly to you via e-mail.

If you are going to be receiving faxes at your Fax Machine, set your fax machine to auto-answer by default. Some Fax Machines do not retain this setting after being turned on or restarted.

2. Connecting

1. Connect the Ethernet Connector labeled **WAN** to your network.

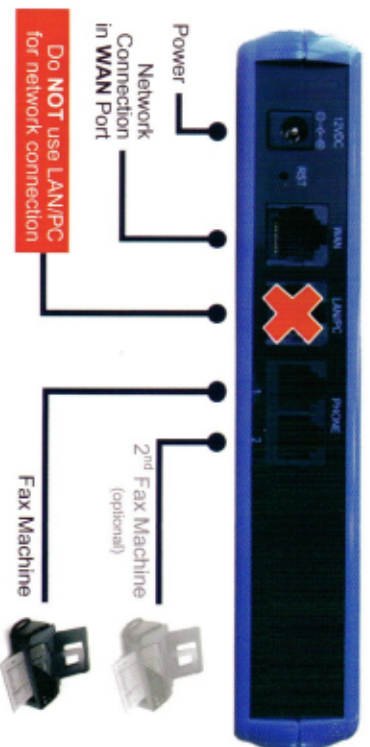

2. Connect the Telephone Port labeled **PHONE 1** to the Fax Machine. Check with your provider whether the second **PHONE 2** port is enabled for use.

3. Connect the Power. There is no ON/OFF (I/O) switch so the Fax ATA turns on as soon as you connect the power. The **POWER LED** is lit (green) and when initialization completes (~1 minute), the **STATUS LED** changes from red to solid green. The unit might automatically reboot within the first few minutes after downloading updated settings from your service provider. This causes all 3 lights to flash simultaneously. **Wait for all 3 lights to again turn solid green.**

Getting Help: Go to www.faxata.com for additional help and documentation.

INITIALIZATION



Wait for all 3 status lights to turn solid green. This usually happens within a minute. However, it could take more than 5 minutes if an automatic upgrade is needed, and can also vary depending on your Internet speed.

WAN STATUS POWER